


Measuring amplifier GSV-6PI Shield

Item number: 10033

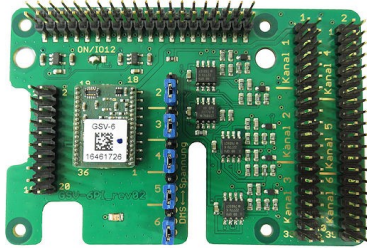

Technical Data

Basic Data		Unit
Dimensions	85 mm x 57 mm x 18 mm	
Housing	Circuit board	
Connection type	Pin header	
Number of channels	6-channel	

Input analog		Unit
Number of analog inputs	6	
input sensitivity-stepsless from	0.1	mV/V
input sensitivity-stepsless to	8	mV/V
Input resistance strain-gauge-half- /quarter-bridge	120 350 1000	Ohm
Input voltage from	1	V
Input voltage to	10	V

Output analog		Unit
---------------	--	------

Accuracy data		Unit
---------------	--	------

Measuring frequency		Unit
Data frequency from	10	Hz
Data frequency to	300	Hz
Sampling frequency	50	kHz

Supply		Unit
Supply voltage from	5	V
Current consumption from	80	mA
Strain gauge bridge supply	3	V

Interface		Unit
Type of the interface	UART	
Quantity of the interface	1	

Zero Adjustment		Unit
Type	Software	

Environmental Data		Unit
--------------------	--	------